
Sulzbachstraße 15 - 94501 Aldersbach







ELECTRIC CABINET HEATER WITH INTEGRATED THERMOSTAT

TYPE: SUPER-SUPER-MINI

Power range: 10W - 50W Voltage range: 24V, 110V - 265V

ceramic heating elements no need of an external controller low surface temperature



Technical data

Order-No.	808000	808001	808002	808003	
Voltage ¹	230V AC				
Power	10W	20W	30W	50W	
Operating current	1,20A	1,20A	1,30A	1,50A	
Weight	140g	140g	170g	180g	
Dimensions (LxWxH)	71x58x22 mm				
Ingress protection ⁴	IP30				
Safety class	SKI				
Operating temperature range / Storage temperature	-40 – +70 °C				
Connection cable ²	0,25m 3×0,75mm²				
Heating element	PTC-cartridge				
Mounting ²	snap-mounting for 35mm DIN-rail				
Type of connection	wiring cable 3x0,75mm (PVL 105°C)				
Surface temperature (at 20 °C ambient temperature)	according to temperature setting (see switch-off temperature)				
Temperaturei settings (intrinsic temperature)) ¹	standard: <38°C On / 54°C Off				
Mounting position	vertical				

(1) customized production for different voltage and temperature settings are available on request

(2) customized production for different cable lenght and mounting are available on request (3) UL Version is available on request (4) IP54 is available on request

















Sulzbachstraße 15 - 94501 Aldersbach **(** +49 (0) 85 43 - 6 24 60 30 **∞** info@lm-therm.de




Lm-therm

Special temperature settings


anti-freeze: <05°C On / 30°C Off

24V AC, 24V DC (20W)

Dimensions

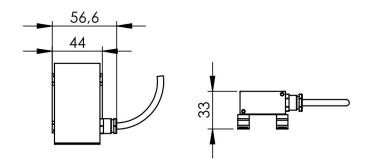

Wiring diagram



	bn (1)	bl (2)	gn/ge (3)
24V DC	+	-	Ţ
24V AC	2	2	Ť
110-265V AC 50/60Hz	L1	Z	PE

The information described on this data sheet contains descriptions or characteristics, which could not apply in the described way in the concrete case. The information of the products can also change in the course of development. The desired characteristics are only binding in the case that they have been explicitly agreed with a contract conclusion. Delivery possibilities and technical changes reserved.

The mentioned technical data have been determined under labor conditions by universal test instructions. Only insofar characteristics are ensured. The test for the suitability for the intended use scheduled by the purchaser is incumbent on the purchaser; we do not take warranty for that. Errors reserved.

Revision: 10/2022 MADE IN GERMANY