

## PTC - HEATING

TYPE: P-70

Power range: 240W  
 Voltage range: 110V- 240V AC/DC

- High safety and energy efficiency thanks to the PTC effect.
- Easy installation thanks to the DIN clip and terminal strip



### Technical data

Order No.	825008
Voltage	240V AC/DC
Power	240W
Operating current	1.04A
Weight	approx. 650g
Dimensions (LxWxH)	210.5x70x46.8
Ingress Protection	IP20
Safety class	II
Operating temperature / Storage temperature	-40 – +70°C
Type of connection	Connection terminal
Heating element	PTC - heating element
Mounting	snap-mounting for 35mm DIN rail EN 50 022
Mounting position	vertical




Special voltages

Special temperature settings

not available


not available

Dimensional drawing

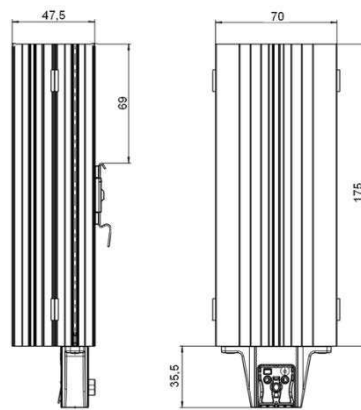

Danger! Heating may only be installed with a distance of 50mm to the side and above 100mm to the next component.

Circuit diagram



U	bn (1)	bl (2)
110-240V DC	+	-
110-240V AC	L1	N (L2)

The information on this data sheet contains descriptions or performance characteristics which do not always apply in the form described in the specific application or which may change due to further development of the products. The desired performance features are only binding if they were expressly agreed upon when the contract was concluded. Delivery options and technical changes reserved. The technical data mentioned were determined under laboratory conditions according to generally applicable test regulations.

As of: 03/2023MADE IN GERMANY

Properties are only guaranteed to this extent. It is the responsibility of the client to check the suitability for the purpose intended by the client, or for use under the conditions of use; We do not assume any warranty for this. Errors excepted.