


# CUSTOMIZED CONFIGURABLE STRANDS

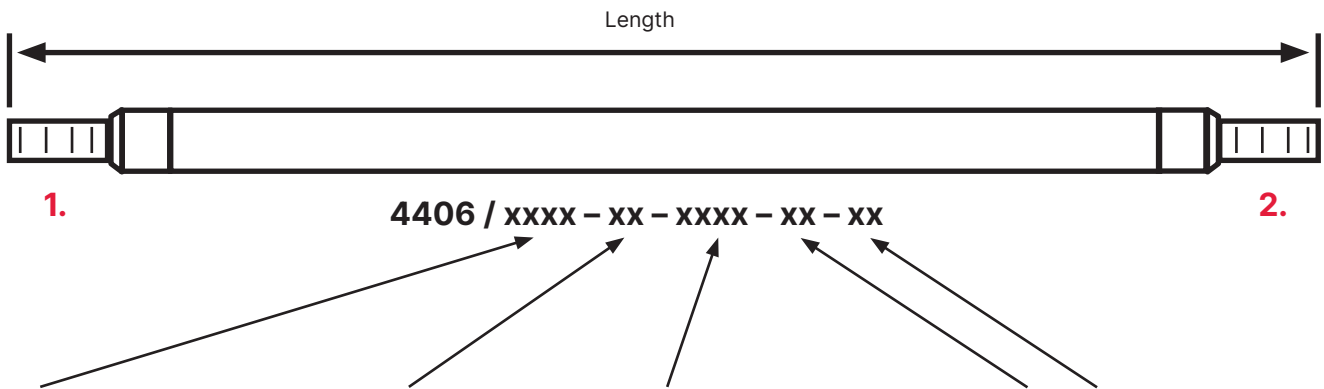

## Length in mm:

(z.B. 0300 = 300mm)

## Color selection:

ws = white  
br = brown  
gn = green  
ge = yellow  
gr = grey  
rs = pink  
bl = blue  
rt = red  
sw = black  
vi = purple  
gn/ge = green / yellow

## Cross-section:

Für H05V-K / H07V-K:

0050 = 0,50mm<sup>2</sup>  
0075 = 0,75mm<sup>2</sup>  
0100 = 1,00mm<sup>2</sup>  
0150 = 1,50mm<sup>2</sup>  
0250 = 2,50mm<sup>2</sup>  
0400 = 4,00mm<sup>2</sup>  
0600 = 6,00mm<sup>2</sup>  
1000 = 10,00mm<sup>2</sup>  
1600 = 16,00mm<sup>2</sup>  
2500 = 25,00mm<sup>2</sup>  
3500 = 35,00mm<sup>2</sup>

For UL/cUL Style 1007/1015:

0021 = AWG 21  
0020 = AWG 20  
0018 = AWG 18  
0016 = AWG 16  
0014 = AWG 14  
0012 = AWG 12  
0010 = AWG 10  
0008 = AWG 8  
0006 = AWG 6  
0004 = AWG 4  
0002 = AWG 2

## Editing options

(side 1 and side 2):

00 = without processing  
01 = Wire end ferrules (uninsulated) 8 mm long  
02 = Wire end ferrules (uninsulated) 10mm long  
03 = Wire end ferrules (uninsulated) 12mm long  
04 = Wire end ferrules (uninsulated) 18mm long  
05 = Wire end ferrules (insulated) 8mm long  
06 = Wire end ferrules (insulated) 10mm long  
07 = Wire end ferrules (insulated) 12mm long  
08 = Wire end ferrules (insulated) 18mm long  
09 = Ring cable lug (uninsulated) M4  
10 = Ring cable lug (uninsulated) M6  
11 = Ring cable lug (uninsulated) M8  
12 = Ring cable lug (uninsulated) M10  
13 = Ring cable lug (insulated) M4  
14 = Ring cable lug (insulated) M6  
15 = Ring cable lug (insulated) M8  
16 = Ring cable lug (insulated) M10  
17 = 3mm stripped + tinning  
18 = 8mm stripped + tinning  
19 = 8mm Stripped  
20 = 12mm Stripped  
21 = Flat receptacles (uninsulated) 2.8 × 0.5  
22 = Flat receptacles (uninsulated) 4.8 × 0.5  
23 = Flat receptacles (uninsulated) 6.3 × 0.8  
24 = Flat receptacles (insulated) 2.8 × 0.5  
25 = Flat receptacles (insulated) 4.8 × 0.5  
26 = Flat receptacles (insulated) 6.3 × 0.8

## NOTE

*This is just a selection from our comprehensive standard range of pre-assembled stranded wires. If you have special requirements or individual requests, we will be happy to support you with our customized strand configuration to meet your specific needs.*



**Lm-therm Elektrotechnik AG**

Sulzbachstr. 15

94501 Aldersbach

Tel: +49 8543/6246030

Fax: +49 8543/6246040

E-Mail: info@lm-therm.de



**Use us as your  
extended workbench!**