

SWITCH CABINET HEATER WITH FAN

VENTSTAR L AL



- ▶ Fan heater
- ▶ Ceramic heating elements
- ▶ No PTC effect
- ▶ Low surface temperature
- ▶ Easy and quick mounting via DIN clip
- ▶ Special voltages possible ¹

HEATING




MADE IN GERMANY

The Ventstar L enclosure heater is a powerful fan heater that has been specifically developed to protect electronic equipment from moisture and frost. It ensures even heat distribution and rapid response to temperature changes. It can be easily integrated into existing systems because of its compact design. The heater also offers flexible customization options in terms of connection voltages, mounting methods and connection types.


TECHNICAL DATA

Art.-No.	834003
Voltage ¹	230V AC
Operating current	3,48A
Power	800W
<hr/>	
Weight	1950g
Dimensions (LxWxD)	205x82,6x101,6mm
Protection type	IP20
Protection class	I (Protective grounding)
Operating temperature/ Storage temperature	-40°C to +70°C
Heating element	Ceramic heating elements
Mounting connection ²	Snap-on mounting for 35mm DIN rail; EN 60715
Type of connection ³	0,50m PVC-Connection cable 3x0,75mm ²
Housing material	Aluminium housing
Fan	Fan volume flow: 45 m ³ /h (50Hz) / 54,6m ³ /h (60Hz) Service life: 100.000 h at +25°C
Temperature safety cut-out	71°C +/- 7,5K (Overheating protection)
Mounting position	Vertical
Certifications	CE, EAC, UKCA

TECHNICAL DRAWING
(SPECIFICATION IN MM)

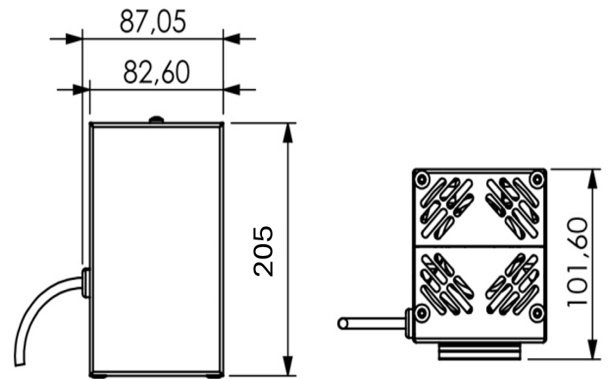

WIRING DIAGRAMM

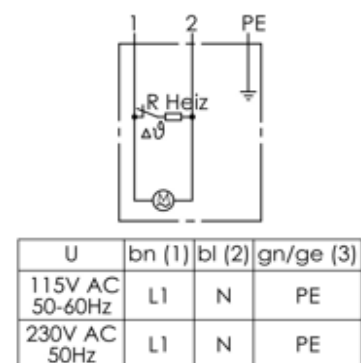

(1) Special voltages e.g.: 115V AC, 400V AC available upon request.
 (2) Other fastenings (e.g. screw fastening) possible on special request
 (3) Other cable lengths possible on special request

STATUS: 01|2025

The information on this datasheet contains descriptions and performance characteristics that may not always apply in the specific use case described or may change due to product development. The desired performance characteristics are only binding if expressly agreed upon at the time of contract conclusion. The mentioned technical data has been determined under laboratory conditions according to generally accepted testing procedures. Only to this extent are properties assured. The examination of suitability for the intended purpose or use under operating conditions lies with the customer. We do not provide any warranty for this. Errors, availability, and technical changes are subject to change without notice.