



## FAN HEATER

**TYPE: GX MINI AK**

Power range: 200W - 300W - 400W  
 Voltage range: 230V

three power ranges with one device  
 fan operation independently possible  
 very compact construction  
 without UL-approval



### Technical data

Order-No.	838001
Voltage	230V AC
Rated Power at 10°C	200W 300W 400W
Operating current at 10°C	0,87A 1,30A 1,74A
Weight	310g
Dimensions (LxWxH)	98x71x70mm
Ingress protection	IP20
Safety class	SK II
Operating temperature range	-10 bis +70
Storage temperature	-40 bis +70
Heating element	PTC-heating
Mounting	snap-mounting for 35mm DIN-rail
Type of connection	5-pole connection terminal
Recommended fuse	6,3A (T)
Blowing-out temperature	ca. 70°C (200W) / ca. 95°C (300W) / ca. 115°C (400W)
Mounting position	vertical




### Special voltage

### Special temperature settings


not available

not available

### Dimensions

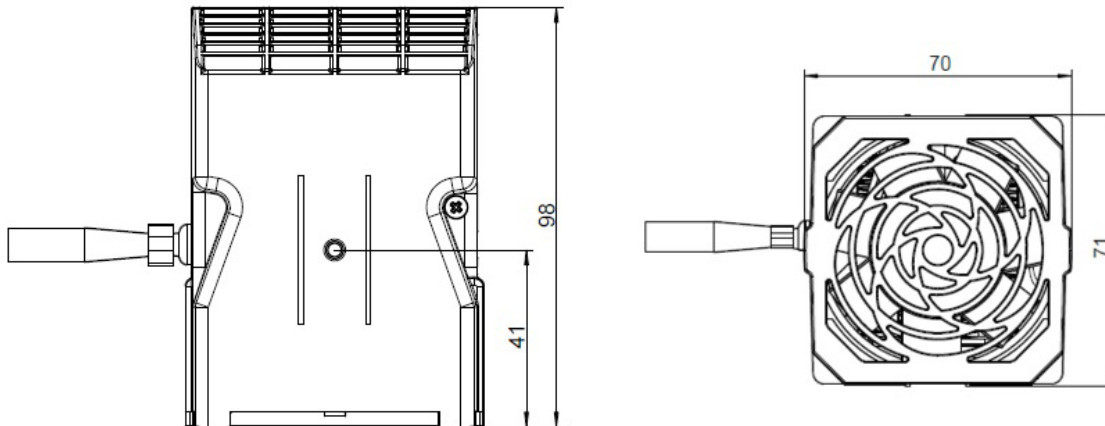

### Wiring diagram

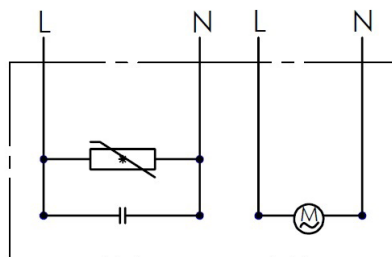

Electrical Connection

flex	function
red	200W - heater
brown	300W - heater
red&brown	400W - heater
blue	neutral conductor heater
gray	230V AC - fan
gray	neutral conductor fan

The information described on this data sheet contains descriptions or characteristics, which could not apply in the described way in the concrete case. The information of the products can also change in the course of development. The desired characteristics are only binding in the case that they have been explicitly agreed with a contract conclusion. Delivery possibilities and technical changes reserved.

The mentioned technical data have been determined under labor conditions by universal test instructions. Only insofar characteristics are ensured. The test for the suitability for the intended use scheduled by the purchaser is incumbent on the purchaser; we do not take warranty for that. Errors reserved.