

EXPLOSION-PROOF ENCLOSURE HEATER

EXH-1/21 / T3



- ▶ ATEX- and CSA-certified for Zone 1 (gas) and Zone 21 (dust)
- ▶ High degree of protection IP66 / IP67
- ▶ Quick mounting on DIN mounting rail
- ▶ Optional 115V AC supply voltage available
- ▶ Maintenance-free convection heating without fan
- ▶ Robust aluminum housing

HEATING




The heaters in the ExH-1/21 series have been specially developed for use in hazardous areas in zones 1, 2, 21 and 22. They are used for reliable temperature control, condensate prevention and frost protection in enclosures and housings. The devices are ATEX and CSA-certified and comply with protection classes IP66 and IP67. Typical applications can be found in industrial environments such as filling stations, biogas plants, paint stores, chemical and petrochemical plants, as well as in mills, silos or other areas with potentially explosive atmospheres.


TECHNICAL DATA

Art.-No.	850003	850004	850005
Voltage ¹	230V AC		
Inrush current / Operating current at 230V AC	0,87A	1,37A	1,75A
Power	200W	315W	400W
Weight	4600g		6800g
Dimensions (LxWxD)	250x100x129mm		400x100x129mm
Protection type	IP66 / IP67; EN60529		IP66; EN60529
Protection class	I (Protective grounding)		
Operating temperature / Storage temperature	-40°C to +60°C		
Heating element	High-performance heating cartridge		
Mounting connection	Snap-on mounting for 35mm DIN rail; EN 60715		
Type of connection ²	1,0m Silicone-Connection cable 3x1,50mm ²		
Housing material	Aluminum housing, black anodized		
Mounting position	Vertical		
Operating humidity / Storage humidity	< 80% RH (non-condensing)		
Atex-marking (gas)	II 2G Ex db IIC T3 Gb		
Atex-marking (dust)	II 2D Ex tb IIIC T200°C Db		
Max. Surface temperature / Temperature class	< +200°C / T3		
Certifications	CE, UKCA, Atex, CSA		

TECHNICAL DRAWING (SPECIFICATION IN MM)

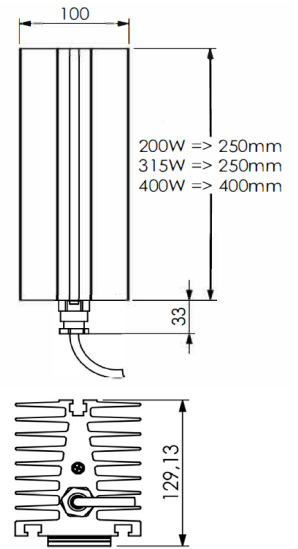

WIRING DIAGRAMM

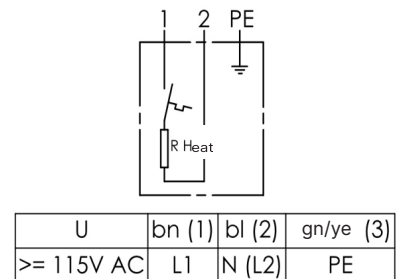

(1) Special voltage 115V AC possible on request

(2) Other cable lengths possible on special request (The cable length must not be less than 1 meter)

STATUS: 05|2025

The information on this datasheet contains descriptions and performance characteristics that may not always apply in the specific use case described or may change due to product development. The desired performance characteristics are only binding if expressly agreed upon at the time of contract conclusion. The mentioned technical data has been determined under laboratory conditions according to generally accepted testing procedures. Only to this extent are properties assured. The examination of suitability for the intended purpose or use under operating conditions lies with the customer. We do not provide any warranty for this. Errors, availability, and technical changes are subject to change without notice.