

EXPLOSION-PROOF ENCLOSURE HEATER

EXH-2/22 / T4



- High degree of protection IP66 / IP67
- Quick mounting on DIN mounting rail
- Optional 115V AC supply voltage available
- Maintenance-free convection heating without fan
- Robust aluminum housing



MADE IN GERMANY

HEATING

The heaters in the ExH-2/22 series have been specially developed for use in potentially explosive atmospheres in zones 2 (gas) and 22 (dust). They are used to prevent condensation, provide frost protection and control the temperature of switch cabinets and enclosures in industrial applications. Typical areas of application are industrial plants, such as pumping stations, paint shops, storage areas for flammable substances or silos and technical rooms in food and animal feed processing.


TECHNICAL DATA

Art.-No.	851001	851002
Voltage ¹	230V AC	
Inrush current at 230V AC	3,1A	0,44A
Operating current	0,31A	0,44A
Power	70W	100W
Weight	2600g	3000g
Dimensions (LxWxD)	120×100×129mm	150×100×129mm
Protection type	IP66 / IP67; EN60529	
Protection class	I (Protective grounding)	
Operating temperature / Storage temperature	-40°C to +60°C	
Heating element	PTC-Heating element	High-performance heating cartridge
Mounting connection	Snap-on mounting for 35mm DIN rail; EN 60715	
Type of connection ²	1,0m Silicone-Connection cable 3×1,50mm ²	
Housing material	Aluminum housing, black anodized	
Mounting position	Vertical	
Operating humidity / Storage humidity	< 80% RH (non-condensing)	
Atex-marking (gas)	II 3G Ex dc IIC T4 Gc	
Atex-marking (dust)	II 3D Ex tc IIIC T135°C Dc	
Max. Surface temperature / Temperature class	< +135°C / T4	
Certifications	CE, UKCA	


(1) Special voltage 115V AC possible on request

(2) Other cable lengths possible on special request (The cable length must not be less than 1 meter)

TECHNICAL DRAWING (SPECIFICATION IN MM)

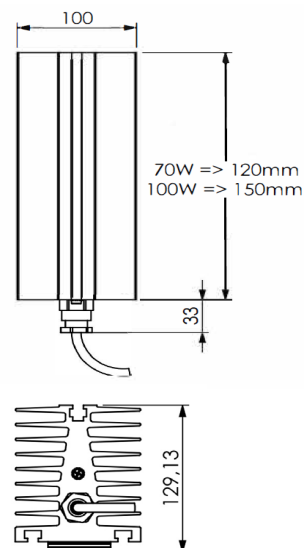

WIRING DIAGRAMM

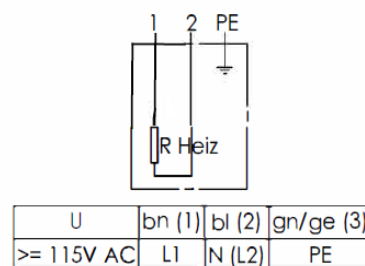

STATUS: 05|2025

The information on this datasheet contains descriptions and performance characteristics that may not always apply in the specific use case described or may change due to product development. The desired performance characteristics are only binding if expressly agreed upon at the time of contract conclusion. The mentioned technical data has been determined under laboratory conditions according to generally accepted testing procedures. Only to this extent are properties assured. The examination of suitability for the intended purpose or use under operating conditions lies with the customer. We do not provide any warranty for this. Errors, availability, and technical changes are subject to change without notice.