

Lm-therm Elektrotechnik AG Sulzbachstraße 15 - 94501 Aldersbach **\$** +49 (0) 85 43 - 6 24 60 30 ☎ info@lm-therm.de

ELECTRIC CABINET HEATER WITH INTEGRATED THERMOSTAT

TYPE: LM-THERM

Power range: 33W - 90W Voltage range: 12V - 400V

ceramic heating elements no need of an external controller

low surface temperature

[ffl〔€ 點

Technical data


Order-No.	800004	800005	800006	
Voltage ¹	230V AC			
Power	33W	55W	90W	
Operating current	0,13A	0,24A	0,3 A	
Weight	300g			
Dimensions (LxWxH)	150,6x72x52mm			
Ingress protection ⁴	IP30			
Safety class	SKI			
Operating temperature range / Storage temperature	-40 – +70 °C			
Heating element	ceramic heating elements			
Mounting ²	snap-mounting for 35mm DIN-rail			
Type of connection	WAGO block 3-pole			
Surface temperature (at 20 °C ambient temperature)	according to temperature setting (see switch-off temperature)			
Temperaturei settings (intrinsic temperature)) ¹	standard: <25°C On / 60°C Off			
Mounting position	vertical			


(1) customized production for different voltage and temperature settings are available on request
(2) customized production for different mounting is available on request
(3) UL Version is available on request
(4) IP54 is available on request





Lm-therm Elektrotechnik AG Sulzbachstraße 15 - 94501 Aldersbach ↓ +49 (0) 85 43 - 6 24 60 30 ∞ info@lm-therm.de

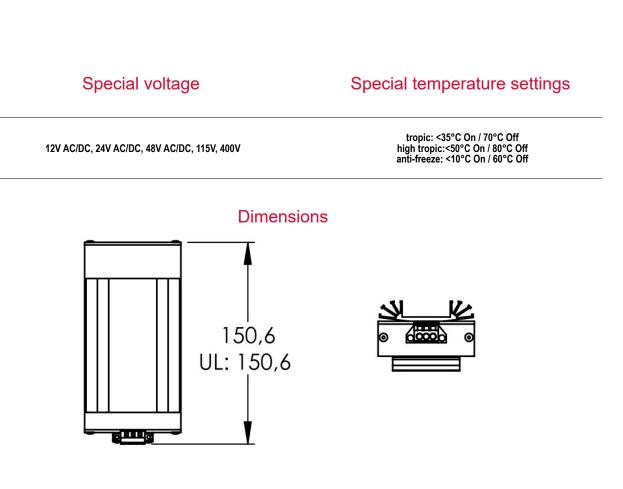



The information described on this data sheet contains descriptions or characteristics, which could not apply in the described way in the concrete case. The information of the products can also change in the course of development. The desired characteristics are only binding in the case that they have been explicitly agreed with a contract conclusion. Delivery possibilities and technical changes reserved.

The mentioned technical data have been determined under labor conditions by universal test instructions. Only insofar characteristics are ensured. The test for the suitability for the intended use scheduled by the purchaser is incumbent on the purchaser; we do not take warranty for that. Errors reserved.