



ELECTRIC CABINET HEATER WITH INTEGRATED THERMOSTAT

TYPE: WADI - LH IP65

Power range: 250W - 380W
Voltage range: 115V - 440V

ceramic heating elements
no need of an external controller
low surface temperature
IP 65

EAC CE UK
CA



Technical data

Order-No.	806003	806004
Voltage ¹	230V AC	
Power	250W	380W
Operating current	1,09A	1,65A
Weight	1700g	
Dimensions (LxWxH)	270,6x80x91 mm	
Ingress protection	IP65	
Safety class	SK I	
Operating temperature range / Storage temperature	-40 – +70 °C	
Connection cable ²	0,50m 3x0,75mm ²	
Heating element	ceramic heating elements	
Mounting ²	snap-mounting for 35mm DIN-rail	
Type of connection	wiring cable 3x0,75mm ²	
Surface temperature (at 20 °C ambient temperature)	according to temperature setting (see switch-off temperature)	
Temperature settings (intrinsic temperature)) ¹	standard: <25°C On / 60°C Off	
Mounting position	horizontal	

(1) customized production for different voltage and temperature settings are available on request
(2) customized production for different cable length and mounting are available on request





Special voltage

115V, 400V, 440V


Special temperature settings

tropic: <35°C On / 70°C Off
 high tropic: <50°C On / 80°C Off
 anti-freeze: <10°C On / 60°C Off

Dimensions

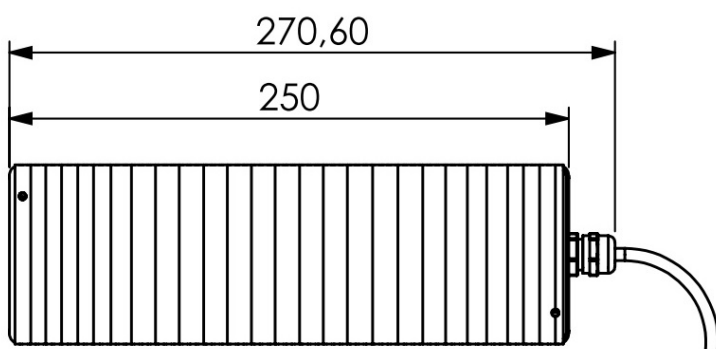

Wiring diagram



U	bn (1)	bl (2)	gn/ge (3)
>= 115V AC	L1	N (L2)	PE

The information described on this data sheet contains descriptions or characteristics, which could not apply in the described way in the concrete case. The information of the products can also change in the course of development. The desired characteristics are only binding in the case that they have been explicitly agreed with a contract conclusion. Delivery possibilities and technical changes reserved.

The mentioned technical data have been determined under labor conditions by universal test instructions. Only insofar characteristics are ensured. The test for the suitability for the intended use scheduled by the purchaser is incumbent on the purchaser; we do not take warranty for that. Errors reserved.